
LUNARIA

LIGHTING LONDON

Auren Glass Ceiling Light

FITTING & CARE GUIDE / V2

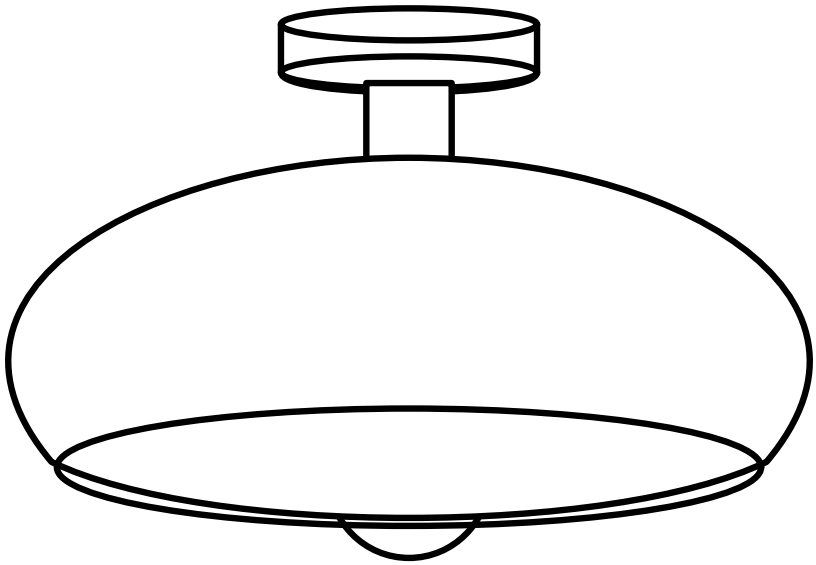


lunarialight.com

hello@lunarialight.com

01 / YOUR LIGHT AT A GLANCE

Auren Glass Ceiling Light

Auren has a coloured glass bowl on a short metal neck, with a round canopy at the ceiling. Its 28 cm diameter and 15 cm overall height create a compact form, while the separately chosen E27 bulb determines the light.

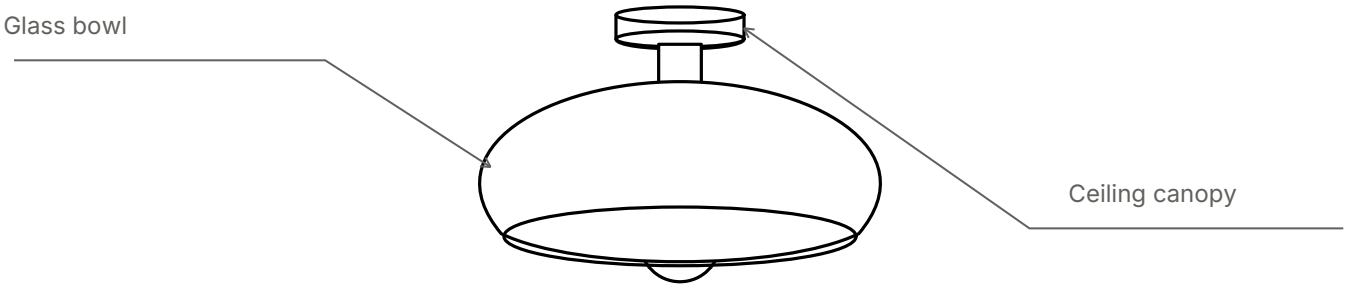

SHADE DIAMETER
28 cm

OVERALL HEIGHT
15 cm

COLOURS
Beige, Green or Pink

LIGHT SOURCE
One E27 bulb

BULB
Not included

Match the glass colour to your order. All three colour cards show the same 28 cm diameter and 15 cm overall height.

Glass bowl

The rounded coloured-glass shade has an open underside around the bulb; its broad rim needs careful support and protection.

Short metal neck

The short neck sits between the bowl and canopy, creating the visible separation from the ceiling without a hanging flex.

Round canopy


The gold-tone canopy forms the top of the fitting at the ceiling; keep its finish clear of tools during preparation.

Check the bowl from below

Mark the ceiling centre and check the 28 cm bowl against nearby beams, cornices and opening doors. Look at the position from the room's main entry as well as directly below. Include the chosen bulb's actual shape when confirming clearance, and keep access below the open bowl for future cleaning.


AUREN GLASS CEILING LIGHT

Prepare & fit




Before fitting

Switch off the lighting circuit at the consumer unit and verify it is dead. Electrical connections and testing must be completed by a competent installer. Keep the light supported until it is securely fixed.



01 Check the position



02 Support the body



03 Check before use

Inspect the glass before fitting

Place the bowl and metal body on clean padding. Check the outer rim and centre for chips or cracks, and keep any loose metal parts separate from the glass surface.

Prepare the correct bulb

Choose one compatible E27 bulb and have its rating and physical size checked against the actual fitting. Keep its packaging so the same specification can be used when a replacement is needed.

1 Check the ceiling position

Confirm the intended centre and clearance using the actual bowl dimensions. Assess the ceiling support and the supplied mounting components before any fixing holes are marked for the fitting.

2 Move glass and metal together

Support the glass body and metalwork as one assembly when lifting it. Avoid holding the full weight by the rim or inserting fingers into the opening to carry it.

3 Keep the rim away from tools

Provide a padded resting place within reach while the installer works. If the bowl needs separating, use the confirmed arrangement for the delivered fitting rather than twisting the glass to test its attachment.

4 Check bulb and bowl clearance


Once secured, have the compatible bulb fitted using the established access method. Check that it is clear of the glass, the bowl is stable and the chosen overhead position remains unobstructed.

AUREN GLASS CEILING LIGHT

Use & look after

Choose the light through the glass

Auren uses one replaceable E27 bulb, which is not included. Your bulb determines the brightness and light colour seen through the bowl. For a dimmer installation, have the installer confirm compatibility of the complete fitting, dimmer and bulb. Keep the bulb specification, and let it cool fully before replacement or cleaning.



Dust the glass bowl

Use a soft, dry cloth on the cool glass, with gentle pressure. Support the body and avoid dragging grit around the rim.



Clean the gold-tone surfaces

Wipe the neck and canopy gently with a dry cloth. Avoid metal polish, abrasive products and direct spraying near the bulb or ceiling connection.

If something needs attention

The light seems too warm or too cool	Check the bulb's stated light colour before replacing anything else. The coloured glass also changes the appearance; compare it with the light off in daylight.
The bulb flickers on a dimmer	Switch off and have the installer check the bulb and dimmer combination against the fitting. Do not assume every E27 bulb can be dimmed.
The bowl is loose or chipped	Leave the fitting off and arrange inspection. Do not tighten the glass itself, use an improvised washer or attempt to repair a crack with glue.

BEFORE SWITCHING ON

- ✓ Fitting secure
- ✓ Fragile parts stable
- ✓ No trapped cable
- ✓ Electrical checks complete