
LUNARIA

LIGHTING LONDON

Calder Ring LED Chandelier

FITTING & CARE GUIDE / V2

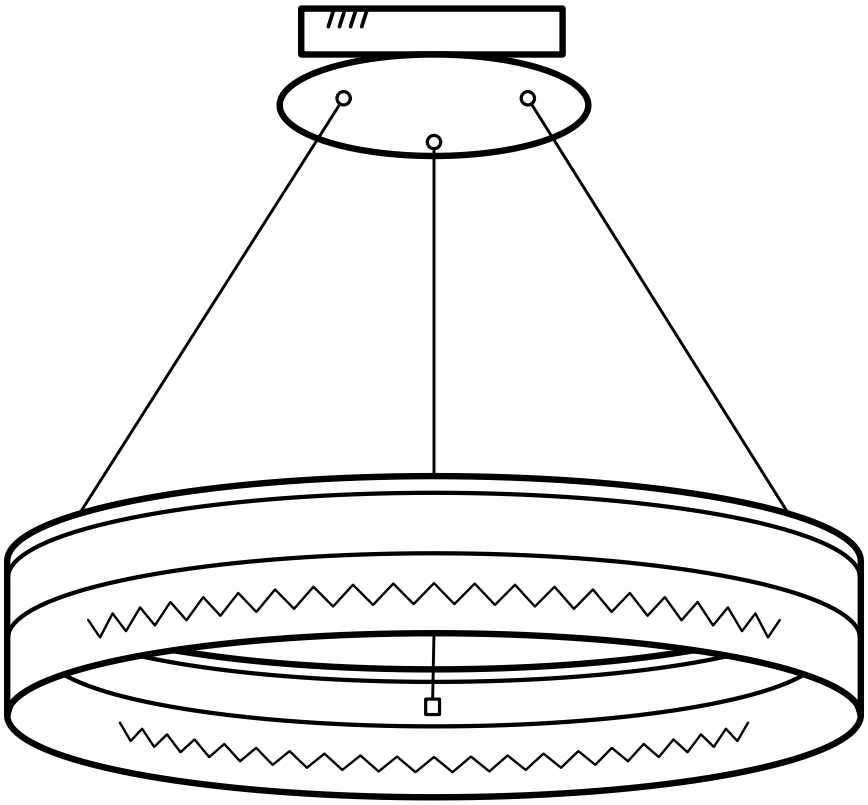


lunarialight.com

hello@lunarialight.com

01 / YOUR LIGHT AT A GLANCE

Calder Ring LED Chandelier

Calder is a ring chandelier: one level ring, a plain metal band above a band of clear faceted acrylic, hung on three fine wires from a matching round ceiling plate. The LED is built into the ring, so there is no separate bulb to fit.

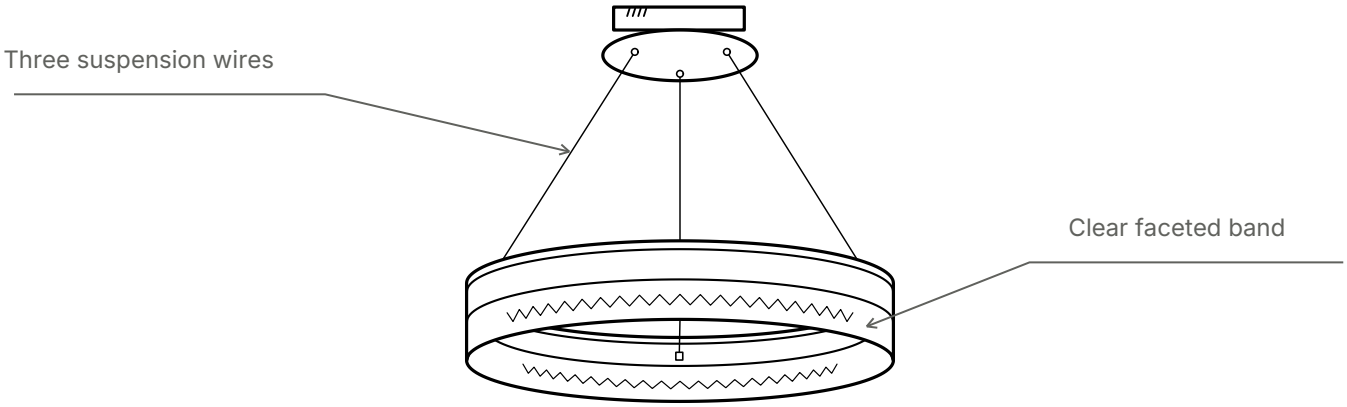

DIAMETER
50 cm, one size

COLOURS
Black, White or Gold

BODY
Metal band and clear acrylic band

LIGHT SOURCE
Built-in LED, three whites

SUSPENSION
Three fine wires, adjustable up to 100 cm

CONTROL
At the wall switch

Check the finish against your order before fitting. The ceiling plate is finished to match the ring, and every finish has the same built-in LED with three whites.

Ring

One level ring carries the light: a plain metal band above a clear faceted acrylic band. Lift it with two hands, by the metal band.

Clear acrylic band

The faceted band spreads the LED light all the way round the ring. Keep tools, tape and sharp edges away from it.

Wires and ceiling plate


Three fine wires run from the ceiling plate to small clamps inside the ring. Keep them, and any lead beside them, straight, without kinks.

Set the height for the room below

Decide where the underside of the ring should sit before the light goes up. Over a dining table it can hang low, down to the full 100 cm. In a living room, keep it high enough for the tallest person in the house to walk beneath it. Check that the ring will sit over the middle of the table, and view it from the doorway.


CALDER RING LED CHANDELIER

Prepare & fit




Before fitting

Switch off the lighting circuit at the consumer unit and verify it is dead. Electrical connections and testing must be completed by a competent installer. Keep the light supported until it is securely fixed.



01 Check the position



02 Support the body



03 Check before use

Unpack onto a soft surface

Lay the ring flat on a clean cloth and let the three wires fall loosely beside it. Check the metal band, the acrylic band and the ceiling plate for marks or cracks before anything is fitted.

Agree the finished height

Measure from the ceiling to where the underside of the ring should hang and note the figure for whoever fits the light. Once all three wires are set, check that the ring hangs level.

1 Check the ceiling point

Compare the ceiling plate and any mounting parts received with the existing ceiling point and the support behind it. The plate should sit flat against the ceiling once fitted.

2 Assemble before it goes up

Some assembly is needed before the light is raised. Lay out the parts received, see how the three wires join the ring and the plate on your light, and complete that on the soft surface, not at the ceiling.

3 Keep the ring supported

Have a second person hold the ring while the ceiling plate is fixed and connected, so that its weight never hangs from a single wire and the acrylic band never knocks against the ladder.

4 Set the three wires


See how the wires on your light lock and adjust before raising it. Bring all three to the agreed height a little at a time, keeping the ring supported until each is secure, then step back and check that it hangs level.

CALDER RING LED CHANDELIER

Use & look after

Built-in LED, three whites

Calder has a built-in LED, so there is no separate bulb to buy or replace. It gives three whites, warm, neutral and cool, one at a time, and the white is changed at the wall switch. Have the installer demonstrate the change on your light. No brightness control is listed for this light: use it on a standard on/off switch.



Dust the ring

With the light off and cool, wipe the metal band with a soft, dry cloth. Support the ring with your other hand so the wires are not pulled.



Keep the acrylic clear

Wipe the faceted band gently with a dry microfibre cloth. Do not use sprays, solvents or abrasive pads, and do not hang anything from the ring.

If something needs attention

The ring hangs unevenly	Switch off, support the ring and compare the three wires. Have the lower side corrected at its wire; do not pull the ring level by hand.
The white is not the one expected	The white is changed at the wall switch. Check any operating information received with your light and the demonstration given at fitting; avoid switching rapidly on and off to guess a sequence.
Part of the ring stays dark	Switch the light off and note which section is affected. Contact LUNARIA with a photo; do not open the ring or the ceiling plate to look for a bulb.

BEFORE SWITCHING ON

- ✓ Fitting secure
- ✓ Fragile parts stable
- ✓ No trapped cable
- ✓ Electrical checks complete