
LUNARIA

LIGHTING LONDON

Eldren Curved Outdoor LED Wall Light

FITTING & CARE GUIDE / V2

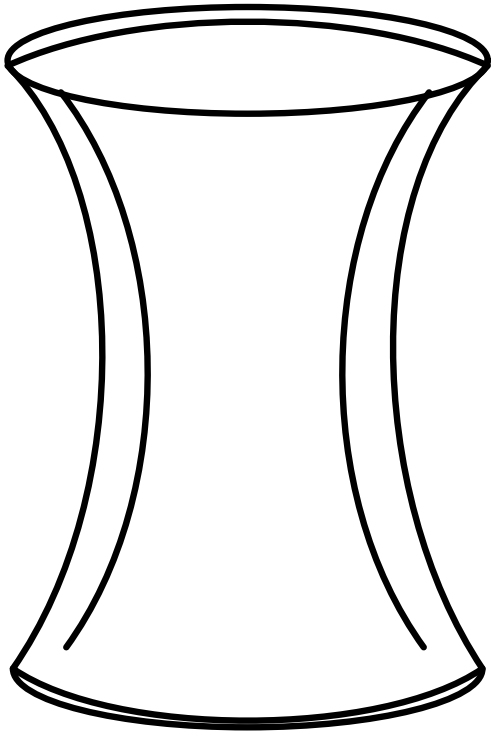


lunarialight.com

hello@lunarialight.com

01 / YOUR LIGHT AT A GLANCE

Eldren Curved Outdoor LED Wall Light

Eldren has a curved hourglass body with light faces at its upper and lower ends. Small and Large versions are separate options, with finish and light-colour choices varying by size. Check the complete ordered combination before preparing the wall position.

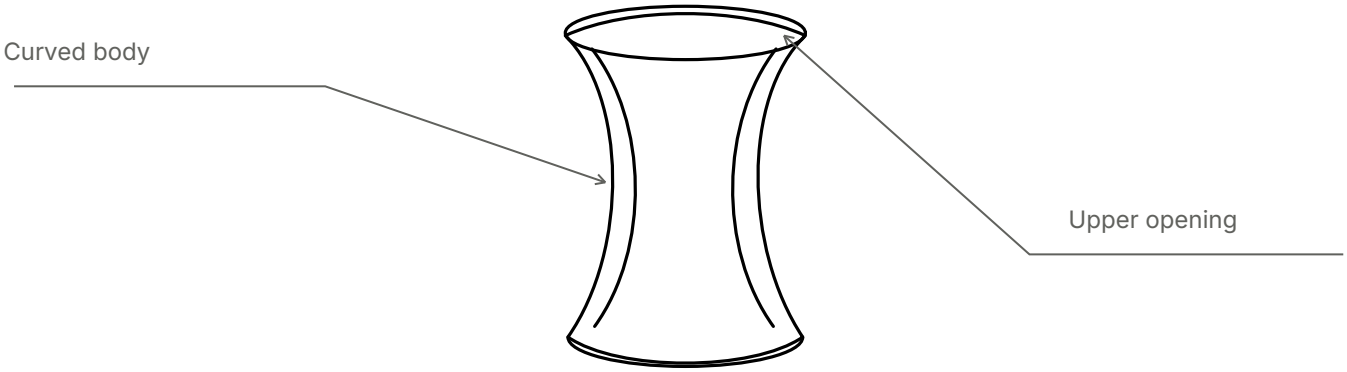

SIZE
Small H 15 × W 7 cm; Large H 20 × W 10 cm

LIGHT SOURCE
Integrated LED

SIZES
Small 6W or Large 10W options

FINISHES
Black and Gold, Black or White, by size

Small Black and Gold offers Warm, Natural or Cool White. Small Black, Small White and Large Black and Gold are Warm White options.

Curved body

The hourglass shell forms the main exterior. Hold it gently without pressing into the upper or lower light faces.

Upper and lower light faces

The two end surfaces provide the light outlets. Inspect them for cracks and keep them clear of debris and obstructions.

Rear mounting area


The rectangular rear area sits against the wall and carries the cable entry. Inspect externally without opening or disturbing its closure.

Check the wall and the exposure

Check the actual body's outline and projection against doors, paths and nearby objects. For an outdoor position, ask the installer to assess the location, delivered product markings and cable entry protection before work begins. Keep the upper and lower light faces unobstructed, and confirm that the wall surface can properly support the delivered size.


ELDREN CURVED OUTDOOR LED WALL LIGHT

Prepare & fit




Before fitting

Switch off the lighting circuit at the consumer unit and verify it is dead. Electrical connections and testing must be completed by a competent installer. Keep the light supported until it is securely fixed.



01 Check the position



02 Support the body



03 Check before use

Match all three options

Check size, finish and light colour against the order and delivered label. Do this before fitting, especially where several lights are intended to match along an outside wall.

Inspect the rear exterior

With the fitting supported, check the body, light faces and visible cable for transport damage. Leave the rear compartment closed and keep all supplied protective or sealing parts together for the installer.

1 Review the actual location

Have the installer assess the selected wall position and environmental exposure against the delivered unit's markings. Do not decide outdoor suitability solely from the shape, finish or the appearance of a closed rear cover.

2 Assess the wall support

Check the wall material and concealed services before marking holes. Use the actual supplied mounting arrangement; assess the Small and Large versions separately from their own delivered parts and instructions.

3 Protect the closed body

Keep the fitting supported while it is positioned, with the light faces clear of tools. Leave opening, cable-entry protection and final closure to the installer following the delivered product instructions.

4 Check the accessible exterior


Before use, look for cracks, displaced covers or trapped visible cable around the completed light. Ask the installer to confirm the weather protection and closure required for the actual outdoor position.

ELDREN CURVED OUTDOOR LED WALL LIGHT

Use & look after

Light colour is chosen when ordering

Eldren uses an integrated LED. The Warm, Natural and Cool White choices identify separate ordered versions where offered; they are not instructions for changing colour with the wall switch. Keep the delivered label and control information. If the light fails or water appears inside, stop using it and arrange an assessment without opening the rear compartment.



Remove surface dust

When off and cool, wipe the accessible exterior with a soft, dry cloth. Keep cleaning pressure light around the upper and lower light faces.



Protect the exterior closure

Do not pressure-wash or direct a hose at the fitting. Avoid solvent sprays and leave sealed joints, cable entries and rear covers undisturbed.

If something needs attention

Moisture appears inside	Switch off the circuit and contact the installer. Do not open the body to dry it, add sealant or drill a drainage hole.
The light colour is wrong	Compare the order and delivered version label. Warm, Natural and Cool White are separate options; do not repeatedly switch power to seek another colour.
The body or cover is loose	Keep the light off and ask the installer to inspect it. Do not tighten random screws or disturb the rear closure to find the cause.

BEFORE SWITCHING ON

- ✓ Fitting secure
- ✓ Fragile parts stable
- ✓ No trapped cable
- ✓ Electrical checks complete