
LUNARIA

LIGHTING LONDON

Elmar Marble Wall Light

FITTING & CARE GUIDE / V2

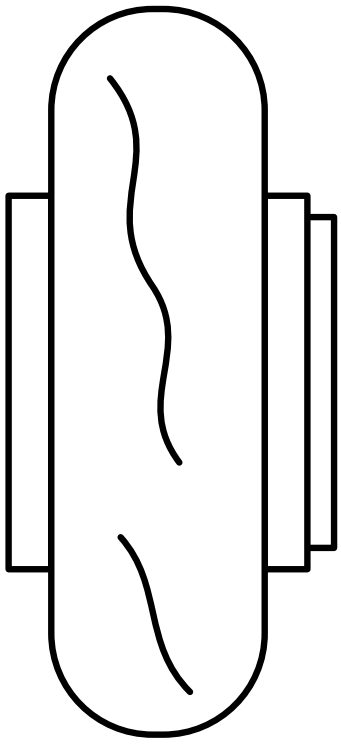


lunarialight.com

hello@lunarialight.com

01 / YOUR LIGHT AT A GLANCE

Elmar Marble Wall Light

Elmar has a tall rounded stone panel between slim metal side supports. Choose a 35 cm or 50 cm height with Gold or Black metalwork; the panel needs careful support during handling, and the fitting takes two separately supplied G4 bulbs.

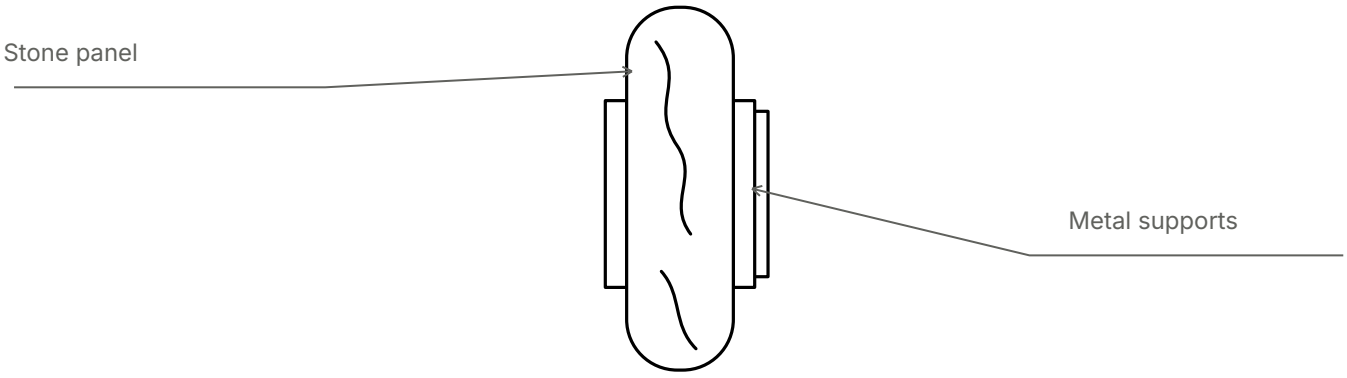

HEIGHTS
35 cm or 50 cm

PANEL WIDTH
10.3 cm

FINISHES
Gold or Black

LIGHT SOURCE
Two G4 bulbs

BULBS
Not included

Check the height and metal finish on the order. For a pair, compare both sizes before planning the wall centres.

Rounded stone panel

The elongated pale panel has rounded ends and a visible stone pattern; support its broad face without loading one edge.

Metal side supports

The slim metal lines frame the stone on either side; protect their finish and avoid using them as release handles.

Rear metal body


The housing behind the panel meets the wall and carries the fitting structure; move it with the stone supported together.

Give the stone a protected wall position

Mark the full 35 cm or 50 cm height beside the bed or entrance furniture, then check the 10.3 cm panel width. Measure the actual wall projection on your fitting. Keep the stone clear of doors, drawer fronts and headboards, and check that people passing will not brush against its edges.


ELMAR MARBLE WALL LIGHT

Prepare & fit




Before fitting

Switch off the lighting circuit at the consumer unit and verify it is dead. Electrical connections and testing must be completed by a competent installer. Keep the light supported until it is securely fixed.



01 Check the position



02 Support the body



03 Check before use

Protect the stone during unpacking

Use clean padding larger than the panel and keep metal tools in a separate tray. Inspect the rounded ends and long edges for cracks or impact damage before the fitting is lifted.

Confirm both bulb specifications

Two G4 bulbs are required. Ask the installer to confirm the correct bulb voltage, permitted rating and physical size from the actual fitting; the G4 base alone does not establish electrical compatibility.

1 Agree the vertical layout

Use a paper outline of the selected height to compare the position with furniture and neighbouring fittings. For a pair, mark both centres and check the view before wall work begins.

2 Assess the wall support

Assess the actual fitting and wall construction before selecting suitable fixings. Keep the stone and metal body supported during examination, with the rounded ends resting safely on the padded surface.

3 Lift the complete body carefully

Support the panel and rear metal body together, keeping pressure off the narrow side rails. Do not loosen visible side parts or slide the stone to create a handhold.

4 Check the final panel position


Before use, inspect the stone from the front and sides for stability and new damage. Confirm its clearance from moving furniture, and have bulb access demonstrated using the delivered fitting's own arrangement.

ELMAR MARBLE WALL LIGHT

Use & look after

Two G4 bulbs, matched to the fitting

Elmar uses two replaceable G4 bulbs, which are not included, and is not offered as dimmable. Keep the installer-confirmed bulb specification with this guide, including voltage and rating. Switch off and let the light cool before servicing. Use the established access method without assuming the stone slides out or the side rails release it.



Dust the stone gently

Use a clean, soft, dry cloth on the cool stone. Avoid acidic cleaners, abrasive pads and soaking, which may damage the surface or finish.



Keep metal and stone protected

Dust the side supports with light pressure while supporting the body. Keep jewellery and hard tools away from the stone edges and rounded ends.

If something needs attention

Two panels have different patterns	Compare their shape, size and finish separately from the stone pattern. Veining and tone can vary; photograph any suspected crack or loose area before use.
Only one end lights	Switch off and note which end is affected. Have both bulbs checked against the recorded specification using the established access method; do not loosen stone-retaining parts.
The stone moves or is chipped	Leave the fitting off and arrange inspection. Do not tighten side rails by guesswork, wedge the panel in place or use adhesive as a repair.

BEFORE SWITCHING ON

- ✓ Fitting secure
- ✓ Fragile parts stable
- ✓ No trapped cable
- ✓ Electrical checks complete