
LUNARIA

LIGHTING LONDON

Halden Ring LED Pendant Light

FITTING & CARE GUIDE / V2

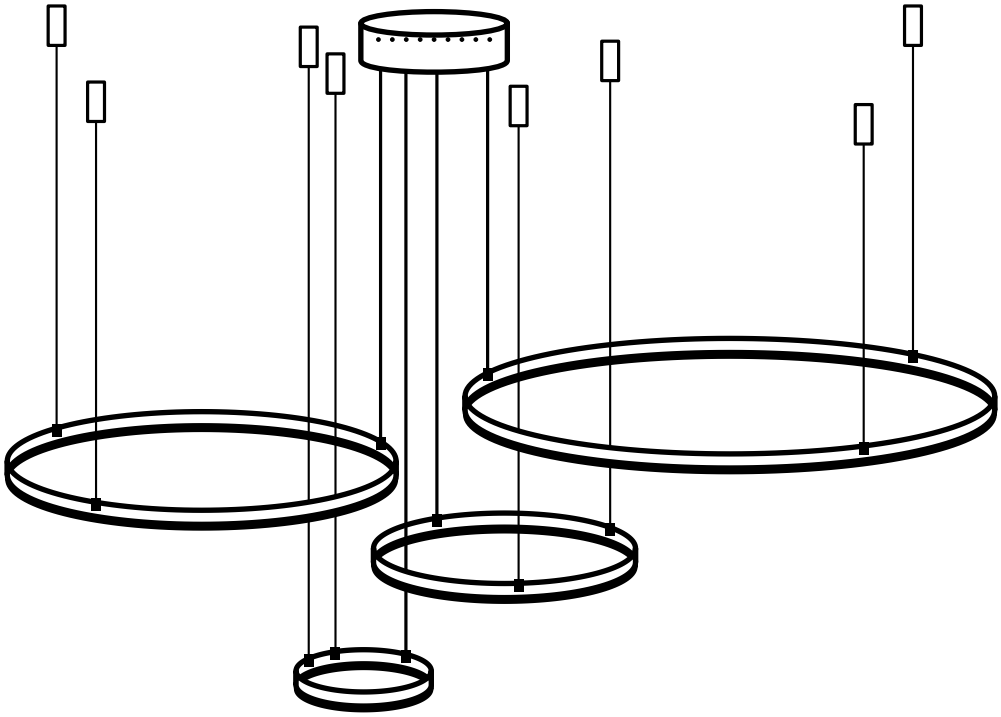


lunarialight.com

hello@lunarialight.com

01 / YOUR LIGHT AT A GLANCE

Halden Ring LED Pendant Light

Halden is a pendant of two, three or four separate rings. Each ring is a brushed metal band lined with a white diffuser, hung on two fine steel wires, and powered by its own cable from one ceiling rose.

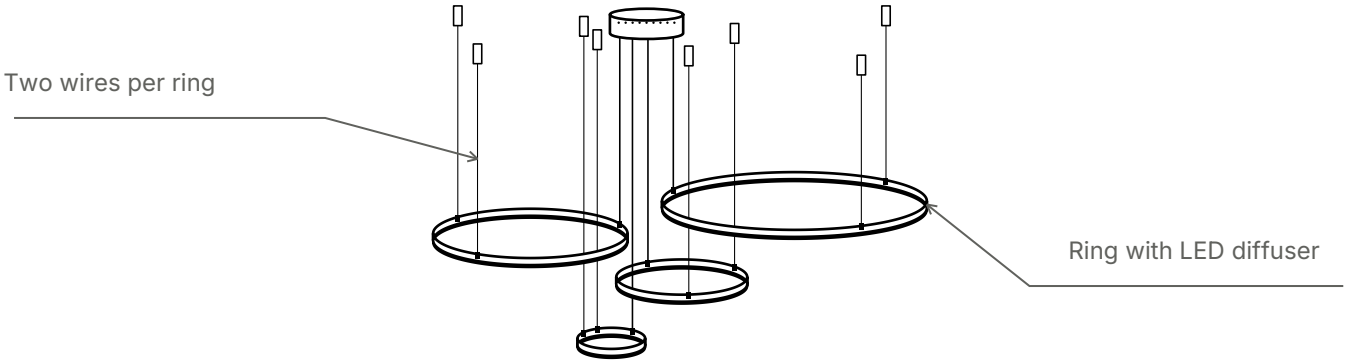

SIZE OPTIONS
2, 3 or 4 rings, 20 to 80 cm

COLOURS
Black or Gold

BODY
Brushed metal bands

LIGHT SOURCE
Built-in LED, warm white

SUSPENSION
Two fine steel wires per ring

FORM
Separate rings at their own heights

Check the number of rings, their diameters and the finish against your order before fitting. The ceiling rose, wire fixings and grips are finished to match the rings, and every ring has the same built-in warm white LED.

Rings

Each ring is one flat brushed metal band with a white diffuser underneath. Lift it by the band, never by its wires.

Wires and fixings

Two fine steel wires hold each ring, each wire rising to its own small ceiling fixing. Keep them straight and free of kinks.

Cables and ceiling rose


One slim power cable runs from each ring to the single round ceiling rose, which connects to the existing supply.

Plan the layout and every height

Each ring hangs from its own two fixing points, so the layout is decided before anything goes up. Lay the rings on the floor in the arrangement you want, mark the rose and every fixing point on the ceiling above, and decide each ring’s height. Over stairs and landings, keep the lowest ring clear of everyone walking beneath it.


HALDEN RING LED PENDANT LIGHT

Prepare & fit




Before fitting

Switch off the lighting circuit at the consumer unit and verify it is dead. Electrical connections and testing must be completed by a competent installer. Keep the light supported until it is securely fixed.



01 Check the position



02 Support the body



03 Check before use

Unpack onto a soft surface

Lay each ring flat on a clean cloth with its wires and cable loose beside it. Check every band, diffuser and the ceiling rose for marks before anything is fitted, and keep each ring's lines apart.

Mark out the ceiling

With the layout agreed, mark the ceiling rose position on the existing ceiling point and two fixing points above each ring: four, six or eight marks in all. Check what the ceiling is made of.

1 Check the ceiling point

Compare the ceiling rose and the wire fixings received with the existing ceiling point and the ceiling around it. The rose should sit flat against the ceiling once fitted, and every fixing must be secure.

2 Keep each ring supported

Have a second person hold each ring while its wires and cable are attached, so its weight never hangs from the power cable or from one wire alone.

3 Hang one ring at a time

Identify how the wires on your light lock and adjust before raising anything. Hang the rings one at a time, bringing each pair of wires to its agreed height a little at a time.

4 Check every ring hangs level


Step back and view the rings from below and from the doorway. If a ring tilts, support it again and correct the lower wire rather than pulling the band into place.

HALDEN RING LED PENDANT LIGHT

Use & look after

Built-in LED, one warm white

Halden has a built-in LED in every ring, so there is no separate bulb to buy or replace. Every ring gives the same fixed warm white. Black and gold describe the finish of the rings, not the colour of their light. The light is not dimmable; do not connect it to a dimmer switch.



Dust the bands

With the light off and cool, wipe each brushed band with a soft, dry cloth, following the brush lines. Steady the ring with your other hand so its wires are not pulled.



Keep the diffusers clean

Wipe the white diffuser under each band gently with a dry microfibre cloth. Do not use sprays, solvents or abrasive pads, and never hang anything from the rings.

If something needs attention

A ring hangs at a slant	Switch off, support the ring and compare its two wires. Correct the lower side at its wire, and never bend the band to level it.
One ring stays dark	Switch the light off and note which ring is affected. Contact LUNARIA with a photo; do not open the ring, the diffuser or the ceiling rose.
A ring is not where it was planned	Switch off and support each ring in turn. Check each fixing against your marks and the height of each pair of wires, correcting one ring at a time.

BEFORE SWITCHING ON

- ✓ Fitting secure
- ✓ Fragile parts stable
- ✓ No trapped cable
- ✓ Electrical checks complete