
LUNARIA

LIGHTING LONDON

Ivera Ultra-Thin LED Ceiling Light

FITTING & CARE GUIDE / V2

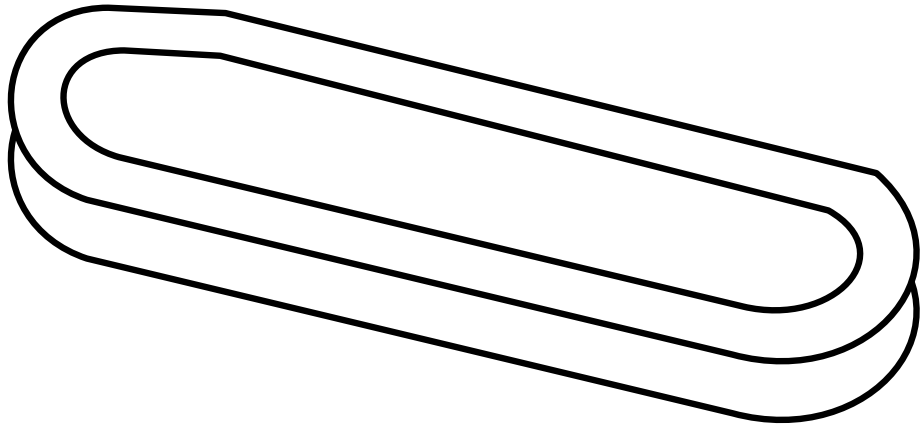


lunarialight.com

hello@lunarialight.com

01 / YOUR LIGHT AT A GLANCE

Ivera Ultra-Thin LED Ceiling Light

Ivera is a long capsule-shaped ceiling light with an integrated LED and a broad acrylic face. Black and White versions are offered in five lengths. Match the ordered length before planning its centre and orientation on the ceiling.

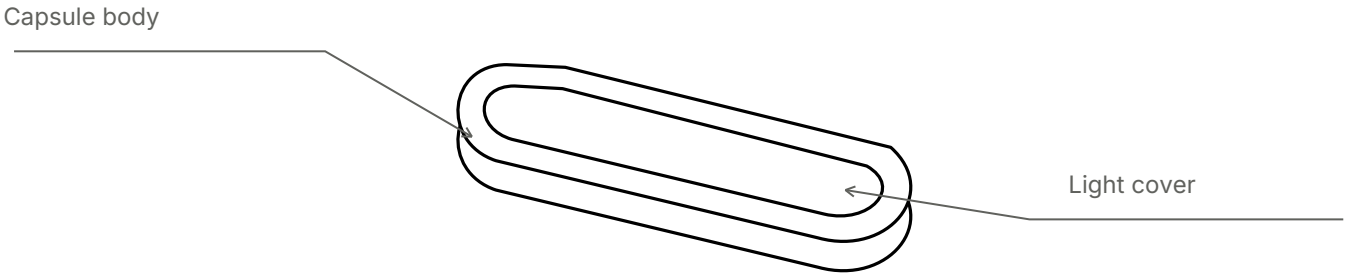

SHAPE
Long capsule

LENGTHS
40, 60, 80, 100 or 120 cm

FINISH
Black or White

LIGHT SOURCE
Integrated LED

Check both finish and length: each colour is offered in five lengths. Use the delivered fitting when assessing mounting positions and support.

Rounded frame

The elongated frame defines the capsule outline. Support it along its length so neither rounded end is left hanging.

Acrylic light face

The broad face covers the integrated light source. Protect it from pressure, scratches and tools during unpacking and fitting.

Two rounded ends


The curved ends mark the full footprint on the ceiling. Include both ends when checking nearby obstructions and alignment.

Align the capsule with the room

Mark the full ordered length on the ceiling plan before choosing the centre. Compare the long axis with the hallway, furniture or room layout, then check doors and hatches for interference. Measure the delivered body before work begins; assess the support arrangement for a longer version from its own supplied parts.


IVERA ULTRA-THIN LED CEILING LIGHT

Prepare & fit




Before fitting

Switch off the lighting circuit at the consumer unit and verify it is dead. Electrical connections and testing must be completed by a competent installer. Keep the light supported until it is securely fixed.



01 Check the position



02 Support the body



03 Check before use

Measure the delivered length

Compare the complete body's length and finish with the order. Keep its version label available for the installer, especially where several lengths are being fitted in the same property.

Prepare full-length support

Use a clean, padded work surface long enough for the body. Inspect the face and both ends for cracks, distortion or transport damage before moving the light to the fitting area.

1 Review the actual supplied parts

Identify the mounting components supplied with this particular length and check them against the delivered instructions. Keep them with the matching light; do not mix parts between several Ivera fittings.

2 Set the long-axis position

Check the proposed centre and orientation from both ends of the room before drilling. Assess concealed services and ceiling support using the delivered fitting's actual mounting arrangement and its supplied instructions.

3 Support both ends

Move the fitting with support along its body and at both ends. Arrange assistance if its length makes it awkward to control; do not pull on the light face or carry it by the cable.

4 Inspect the perimeter


After fitting, look along the full frame for a displaced cover or uneven seating. Ask the installer to resolve any visible distortion before use, rather than pressing the acrylic face into position.

IVERA ULTRA-THIN LED CEILING LIGHT

Use & look after

Check the delivered lighting version

Ivera contains an integrated LED, and this version offers three white tones without a remote. Keep the control information supplied with your unit. Ask the installer to demonstrate its operation after testing; do not assume a particular switching sequence, memory behaviour or dimmer compatibility from the appearance of the fitting.



Clean along the face

When off and cool, wipe the acrylic lightly with a soft, dry cloth. Work along the surface without pushing against the centre.



Protect the long frame

Dust the rim and rounded ends without leaning on them. Avoid solvents, scouring pads and hanging decorations from the fitting or its edges.

If something needs attention

The light colour is unexpected	Check the version details supplied with the light and record the behaviour for support. Do not assume repeated rapid switching is the correct control method.
One area is dark or flickering	Switch off and note which part of the capsule is affected. Leave the cover in place and arrange an installer or support assessment.
One end appears uneven	Keep clear beneath the fitting and ask the installer to check its seating. Do not twist the long body or force the acrylic face upwards.

BEFORE SWITCHING ON

- ✓ Fitting secure
- ✓ Fragile parts stable
- ✓ No trapped cable
- ✓ Electrical checks complete