
LUNARIA

LIGHTING LONDON

Marlow Linear LED Pendant Light

FITTING & CARE GUIDE / V2

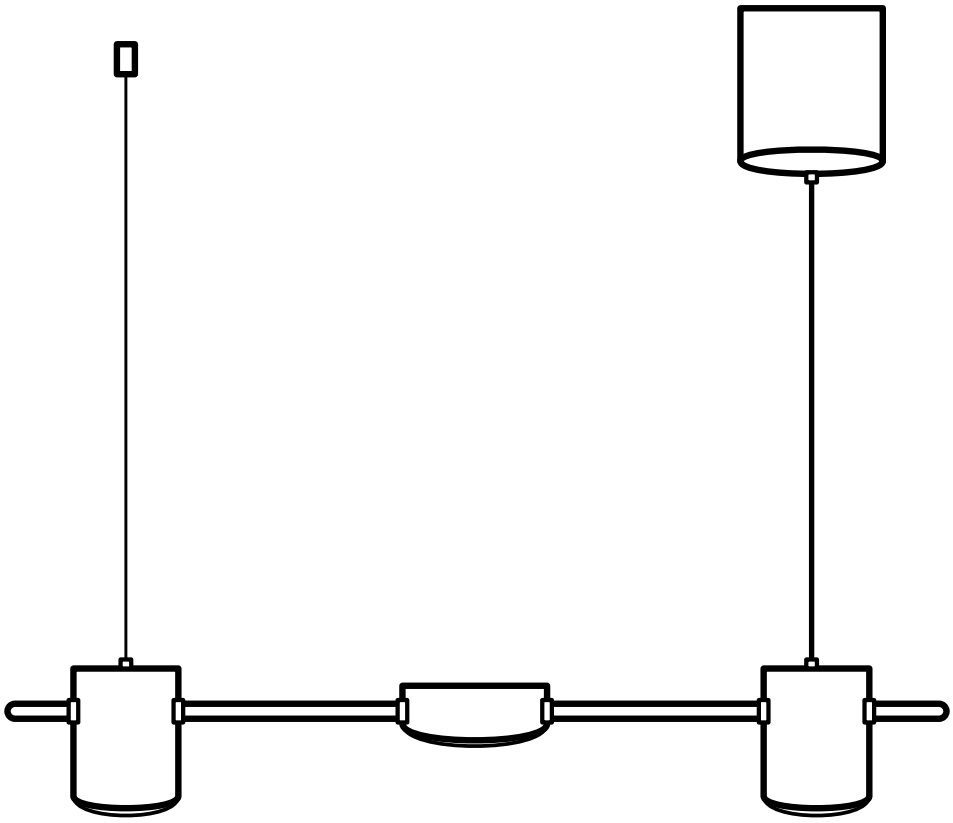


lunarialight.com

hello@lunarialight.com

01 / YOUR LIGHT AT A GLANCE

Marlow Linear LED Pendant Light

Marlow is a pendant built on one slim metal rod that carries a row of small downward lights, cylinders and flat discs in turn. It hangs from a matching ceiling rose and one or two fine wires; the LED is built into every head.

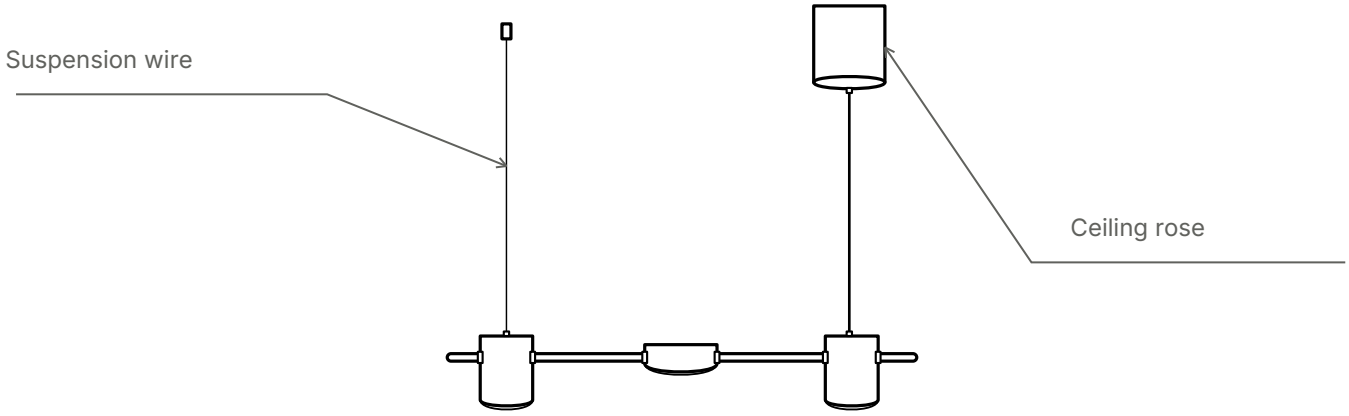

SIZE OPTIONS
70 cm with three lights; 120 cm with five

COLOURS
Black or Gold

BODY
Metal rod and heads, white diffusers

LIGHT SOURCE
Built-in LED in every head

SUSPENSION
One or two fine wires and a power flex; drop up to 120 cm

CONTROL
Warm, neutral or cool white, from the wall switch

Check the length and finish against your order before fitting. The drawing shows the 70 cm version, whose ceiling rose sits above one end. The 120 cm version has five lights, its ceiling rose above the centre and a fine wire at each end.

Rod and heads

One straight rod carries the heads: cylinders at the ends, flat discs between. Lift the light by the rod, with both hands.

Diffusers

A flat white diffuser closes the underside of every head and sends the LED light downwards. Keep tools, tape and sharp edges away from it.

Lines and ceiling rose


Each fine wire rises from a cylinder to its own small ceiling fixing. The power flex runs from another cylinder to the ceiling rose.

Plan where the rod will hang

Decide where the rod should hang before anything goes up. On the 120 cm the ceiling rose sits above the centre of the rod. On the 70 cm it sits above one end, so the rod hangs to one side of the ceiling point. Each fine wire needs its own small fixing in the ceiling, directly above the cylinder it holds.


MARLOW LINEAR LED PENDANT LIGHT

Prepare & fit




Before fitting

Switch off the lighting circuit at the consumer unit and verify it is dead. Electrical connections and testing must be completed by a competent installer. Keep the light supported until it is securely fixed.



01 Check the position



02 Support the body



03 Check before use

Unpack onto a soft surface

Lay a clean cloth on a table and stand the light on it. Let its lines fall loosely beside it, then check the rod, the heads and the diffusers for marks before anything is fitted.

Mark the ceiling points

With the rod held where it should hang, note where the ceiling rose and each wire fixing will go: every line should run straight up from its cylinder. Check what the ceiling is made of at each point.

1 Check the ceiling point

Compare the ceiling rose and any mounting parts received with the existing ceiling point and the support behind it. The rose should sit flat against the ceiling once fitted.

2 Keep the rod supported

Have a second person hold the rod while the ceiling rose is fixed and connected and each wire fixing is secured. Keep it supported until every line is in place, so no single line takes the whole weight.

3 Set the drop

Identify how the lines on your light lock and adjust before raising it. Bring the rod to the agreed height a little at a time, keeping it supported, and stop if a line slips or kinks.

4 Check it hangs level


Step back and look along the rod from the end of the table. If one end sits lower, support the rod again and correct that line rather than pulling the rod into place.

MARLOW LINEAR LED PENDANT LIGHT

Use & look after

Built-in LED, three whites from the wall switch

Marlow has a built-in LED in every head, so there is no separate bulb to buy or replace. It gives three whites: warm, neutral and cool. The wall switch is its only control: switch the light off and back on, and it changes to another white. It is not dimmable; do not connect it to a dimmer switch.



Dust the rod and heads

With the light off and cool, wipe the metal with a soft, dry cloth, steadying the rod with your other hand so the lines are not pulled. Do not use polish, sprays or solvents.



Keep the diffusers clean

Wipe each white diffuser gently with a dry microfibre cloth. Do not press on it, do not use abrasive pads, and do not hang anything from the rod.

If something needs attention

The rod hangs unevenly	Switch off, support the rod and compare the lines. Have the lower end corrected at its own line; do not bend the rod or twist a head to level it.
The white is not the one expected	Switch the light off and back on at the wall to change the white, and repeat until the one you want returns. There is no other control to look for.
One head stays dark	Switch the light off and note which head is affected. Contact LUNARIA with a photo; do not open a head or the ceiling rose to look for a bulb.

BEFORE SWITCHING ON

- ✓ Fitting secure
- ✓ Fragile parts stable
- ✓ No trapped cable
- ✓ Electrical checks complete