
LUNARIA

LIGHTING LONDON

Tarin Black Tube Pendant Light

FITTING & CARE GUIDE / V2

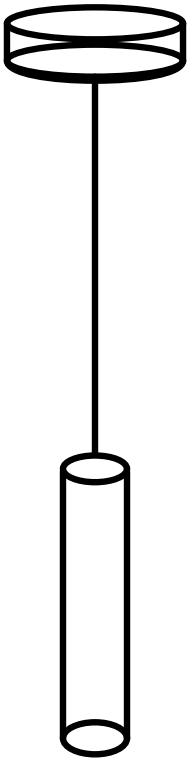


lunarialight.com

hello@lunarialight.com

01 / YOUR LIGHT AT A GLANCE

Tarin Black Tube Pendant Light

Tarin is a single straight black tube suspended on a slim cable, with a downward-facing white LED source. The 30 cm tube and 150 cm cable are separate measurements, so the complete installed drop needs planning at the ceiling.

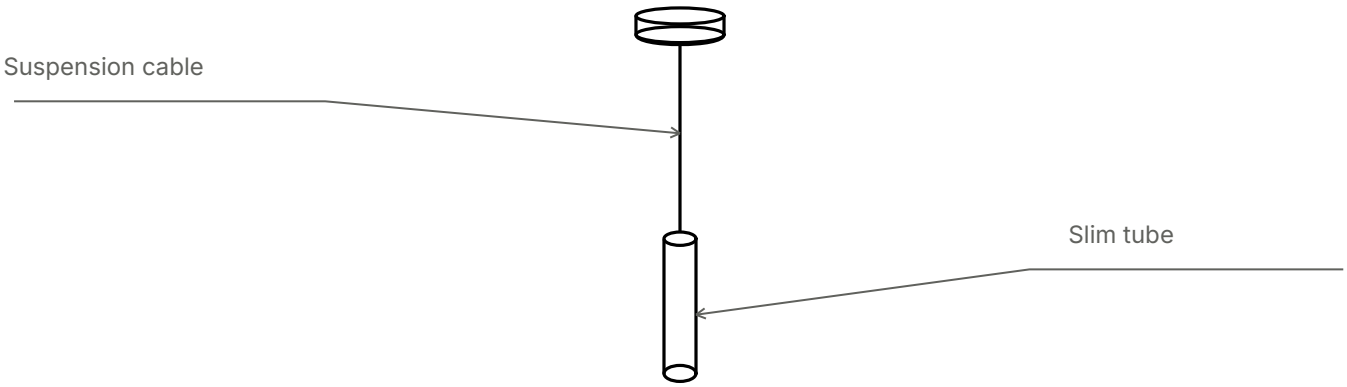

TUBE HEIGHT
30 cm

TUBE DIAMETER
3 cm

CABLE LENGTH
150 cm; cable only

FINISH
Black

LIGHT
White LED source included

This guide covers the single straight black tube. Check that the delivered form matches your order before measuring the suspension.

Black tube

The straight metal tube forms the visible light body; handle its sides gently and keep its lower opening clear.

Suspension cable

The slim cable rises from the tube to the ceiling; protect it from sharp bends and pulling during preparation.

Round canopy


A small round canopy sits at the ceiling above the tube, forming the visible top of each individual pendant.

Position the light at the surface below

Choose the ceiling point in relation to the bedside table, counter or other surface to be lit. Check the tube's final bottom position from both seated and standing viewpoints. Keep it clear of opening doors and curtains, and measure the full installed drop separately from the 150 cm cable length.


TARIN BLACK TUBE PENDANT LIGHT

Prepare & fit




Before fitting

Switch off the lighting circuit at the consumer unit and verify it is dead. Electrical connections and testing must be completed by a competent installer. Keep the light supported until it is securely fixed.



01 Check the position



02 Support the body



03 Check before use

Unpack without letting it swing

Lay the tube and cable on a clean, padded surface. Keep hold of the tube while moving the canopy so the slender body cannot swing into furniture or strike a hard floor.

Record the intended bottom height

Measure from the ceiling to the desired bottom of the tube and write it down. Use this complete measurement when planning the suspension, so the tube length is included in the finished drop.

1 Check the individual ceiling point

Check the proposed support position and electrical point for each individual pendant. If fitting several, mark every centre and intended bottom height before any ceiling fixing work begins.

2 Keep the cable relaxed

Lay out the cable gently to reveal any kinks or damage. Do not pull it straight by the tube, tightly coil surplus length or clamp it with tools during preparation.

3 Support the tube during ceiling work

Keep the tube cushioned or supported by a second person while the canopy is prepared. The light body should not swing freely or rest its weight on exposed conductors.

4 Confirm the finished alignment


View the completed pendant from two directions to check its hanging position. For a group, compare the agreed bottom heights and spacing, and report any lean without twisting the tubes to compensate.

TARIN BLACK TUBE PENDANT LIGHT

Use & look after

A downward-facing white light

The supplied LED source directs white light downwards from the end of the tube. Keep that opening unobstructed and position objects below without touching the fitting. If output changes or the source stops working, leave servicing to the installer or LUNARIA; do not open the tube to try a substitute bulb.



Dust the tube

When the light is off and cool, wipe the tube with a soft, dry cloth while supporting it to prevent swinging.



Keep the opening clear

Remove loose surface dust gently around the lower opening. Do not insert tools, wet cloths or cleaning sprays into the tube or canopy.

If something needs attention

The tube is swinging or leaning	Keep the area clear and ask the installer to inspect the suspension. Do not shorten, twist or knot the cable to correct the position.
The light does not fall where expected	Check whether the furniture has moved relative to the tube. Discuss the position with the installer; do not bend the tube or pull its cable sideways.
The LED flickers or stops	Switch off and record whether the fault is constant or intermittent. Contact LUNARIA or the installer, without opening the tube or testing any exposed connections.

BEFORE SWITCHING ON

- ✓ Fitting secure
- ✓ Fragile parts stable
- ✓ No trapped cable
- ✓ Electrical checks complete